




THE BIT LIGHT

OCTOBER 2015

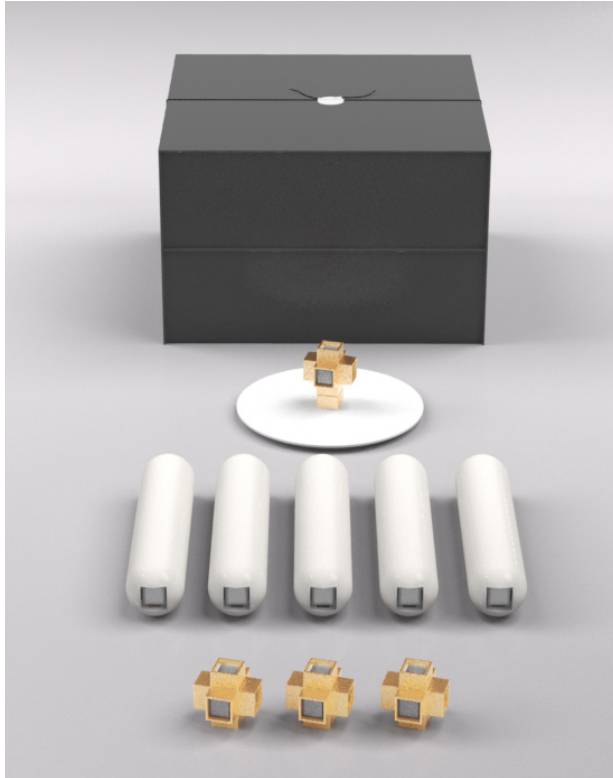

SPECIFICATION

A reconfigurable modular lighting system consists of luminaries, connectors and a terminal power source.

DESIGNER: Jin Choi + Thomas Shine

INSTALLATION: Wall/ceiling surface mount or recess mount.

ENVIRONMENT: Indoor, dry locations only

MATERIALS

- BIT: PMMA and ABS shell, nickel and copper electrical contacts
- Connector: Nickel ferromagnetic plates, ABS and 24 karat gold plated casing
- Canopy: Nickel ferromagnetic plates, ABS, 24 karat gold plated, painted steel and aluminum alloys
- Anchor: Nickel ferromagnetic plates, ABS insulator and 24 karat gold plated casing

DIMENSIONS

- BIT: 6.14" x 1.25" dia. (156mm x 32mm dia.)
- Connector: 1.25" x 1.25" x 1.25" (32mm x 32mm x 32mm)
- Canopy: 1.88" x 4.72" dia. (48mm x 120mm dia.)
- Anchor: 0.55" x 0.55" x 0.47" (14mm x 14mm x 12mm)
- BIT: Satin white
- Connector: Polished 24 karat gold
- Canopy: White powder coated top and polished 24 karat gold connector
- Anchor: Polished 24 karat gold

FINISH

- BIT: Satin white
- Connector: Polished 24 karat gold
- Canopy: White powder coated top and polished 24 karat gold connector
- Anchor: Polished 24 karat gold

WEIGHT


- BIT: 5 oz. (142g)
- Connector: 1.5 oz. (42g)
- Canopy: T.B.D.
- Anchor: 0.5 oz (14g)

POWER: 12V DC, 5A. Max. 40W per assembly (16 BITs)


LAMP: 12V DC permanent LED modules, 2.2 W per BIT

BRIGHTNESS: Approximately 270 lumens per BIT

LIGHT CONTROL: Hard wired, non-switching (triac) transformer

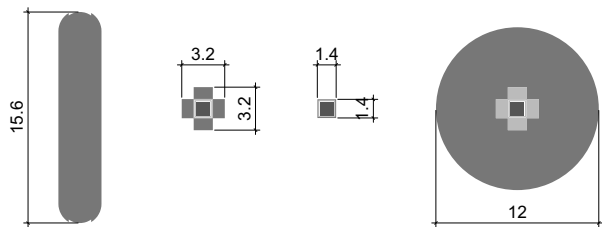

TOP VIEW

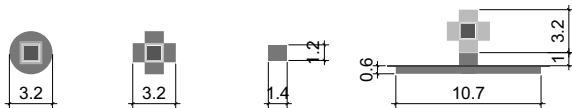

SIDE VIEW

All dimensions are in mm.

All specification are correct at the time of publication but are subject to change without notice. Oct. 1, 2015 © Choi+Shine Design Store, LLC, 2015. All rights reserved.

